

NexSun^{1000SL} Solar Security light




Supplied with:
1 x Security light
1 x Solar panel
and fixings




Security light Installation:


We recommended the security light is installed around 6.5ft high. Make sure the motion detection is not illuminated by street lights at night as this may effect the motion sensor.

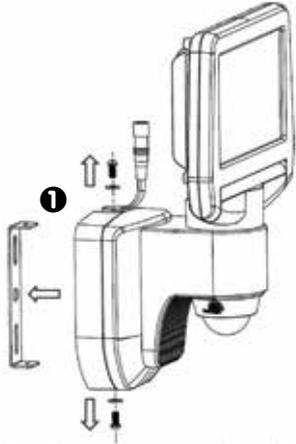

Loosen the two screws on the back of the main unit to release the mounting plate.

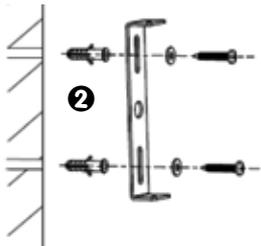

Use the holes on the mounting plate to mark the positions of the screws for drilling. Drill two holes in the mounting location, insert wall plugs and fix the mounting plate with screws.

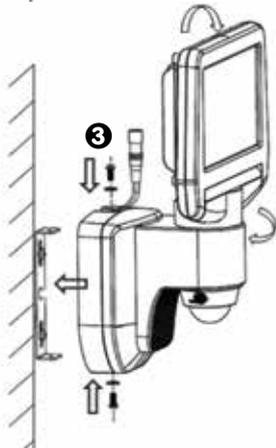


Use two screws to attached the floodlight back onto mounting plate.


Rotate and adjust the LED light to illuminate the desired area.

Solar Panel Installation:

Find a sunny location to mount the solar light ideally south facing is best.

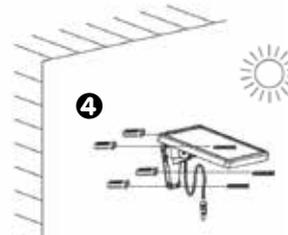

Use the holes on the mounting plate to mark out drill holes. Drill four holes, insert wall plugs and fix the mounting plate with screws. Rotate the solar panel so it is in direct sunlight.



Connect the solar panel to your flood light by plugging the cord into the cord attached to the flood light.



ON/OFF Switch:

Turn the floodlight on using the switch located behind the flood light head.

Setting up the Lux and Time controls:

The Lux and Time controls are on the left and right side of the PIR sensor.



Set the **Time** adjuster to regulate the length of time the light remains illuminated when triggered. Choose between 3 seconds to 7 minutes.

Set the **LUX** adjuster to the required operating level ie. dusk to dawn.

Please note after initial installation, the product needs about 2 days for charging under direct and opulent sunlight, before it can operate normally.

If at any time, you need to dispose of this product or parts of this product: please note that waste electrical products and batteries should not be disposed of with ordinary household waste. Recycle where facilities exist. Check with your local authority for recycling advice. Alternatively, NightSearcher is happy to take receipt of this product at end-of-life and will recycle it on your behalf.



To view and download the full manual in multiple languages please go to <https://nightsearcher.co.uk/en/products-manuals.html> Or scan this QR code.



NexSun is a brand of NightSearcher Ltd.

NightSearcher Limited, Unit 4 Applied House, Fitzherbert Spur, Farlington, Portsmouth, Hampshire, PO6 1TT, UK

T: +44 (0)23 9238 9774 E: sales@nightsearcher.co.uk

All NexSun products have a 3 year standard warranty on all manufacturing defects and 1 years on rechargeable batteries from the date of purchase. Please visit www.nexsun.co.uk for warranty information, proof of purchase is required.



Product weight	1.11kg
Product size	283x189x130mm
NS Part No.	NEXSUN-1000SL