


## Grade 10 Cartec Swivel Eyebolt – 807X – G10SEBK

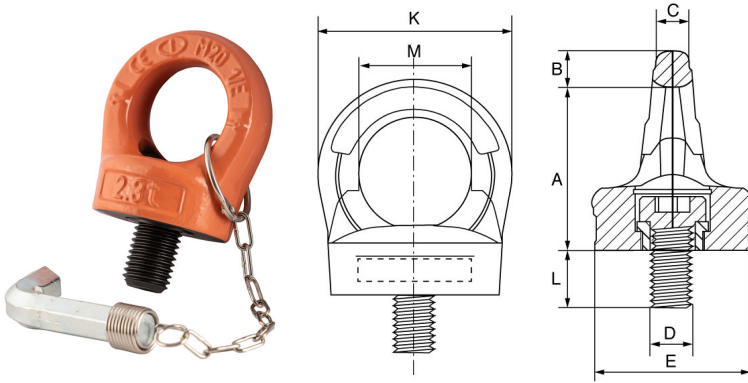

## CARTEC

- Grade 10 alloy steel.
- Pink painted finish.
- Minimum breaking load is 4 times the W.L.L.
- Non standard threading and stem length available.
- Can be oriented at 360°.
- Captive screws.
- On the axial pull there can be variation of +/-5° with a 10% decrease in capacity.
- Not suitable for rotating under load.
- Full CAD support available upon request.
- Certification available **2.1** **DoC**

Product Code	Product Code	D	L	W.L.L.	A	B	C	M
without key	with key	mm	mm	t	mm	mm	mm	mm

Product Code without key	Product Code with key	D mm	L mm	W.L.L. t	A mm	B mm	C mm	M mm
G10SEB8	G10SEBK8	M8	12	0.3	44.5	8	10	29
G10SEB10	G10SEBK10	M10	16	0.4	44.5	8	10	29
G10SEB12	G10SEBK12	M12	18	0.75	53.5	11	11	34
G10SEB16	G10SEBK16	M16	24	1.5	56.5	13	14.5	39
G10SEB20	G10SEBK20	M20	30	2.3	67	14	17	42
G10SEB24	G10SEBK24	M24	36	3.2	80	18	19	52
G10SEB30	G10SEBK30	M30	43	4.5	101	22	27	62
G10SEB36	G10SEBK36	M36	54	7	125	37	38	80
G10SEB42	G10SEBK42	M42	64	9	148	40	41	90
G10SEB48	G10SEBK48	M48	72	12	165	45	47	95

Product Code without key	Product Code with key	E mm	K mm	Torque Nm	Weight kgs
G10SEB8	G10SEBK8	32	45	8	0.3
G10SEB10	G10SEBK10	32	45	16	0.3
G10SEB12	G10SEBK12	44	56	28	0.46
G10SEB16	G10SEBK16	56	65	70	0.9
G10SEB20	G10SEBK20	58	70	135	1.15
G10SEB24	G10SEBK24	73	88	230	2.05
G10SEB30	G10SEBK30	80	106	465	3.12
G10SEB36	G10SEBK36	95	154	814	6.7
G10SEB42	G10SEBK42	105	170	1304	9.5
G10SEB48	G10SEBK48	120	185	1981	13.55