

# STOP

## FALL ARRESTER / SRL

### FEATURES

- Shock absorbing brake
- Stopping distance 0.6 to 1 m
- Snaphook karabiner with fall indicator
- Steel or synthetic lifeline options
- Built to last
- Includes top karabiner



### INFORMATION


The STOP is a durable fall arrest block (SRL 2-way) with a steel or synthetic cable. Engineered to remain in service for longer and conform to the latest EN 360:2023.

The SAVER & STOP fall arresters are available with a steel or synthetic lifeline.

The new synthetic models follow the same construction and function of the popular SAVER/STOP fall arrester range, but are fitted with a high performance HMPE fibre lifeline. Using synthetic ropes for fall arrest systems can offer several benefits compared to traditional materials like steel cables.

Product Code	Conformity	Max. Working Load	Min. Working Load	Lifeline Length	Lifeline / Snap Hook Material
GSE510SSK	EN 360: 2023	141 kg / 310 lb	60 kg / 132 lb	10 m / 32 ft	Stainless steel
GSE514G				14 m / 46 ft	Zinc plated steel
GSE514P					Synthetic lifeline, zinc plated steel snap hook
GSE525SSK				25 m / 82 ft	Stainless steel
GE530G				30 m / 98 ft	Zinc plated steel
GSE530P					Synthetic lifeline, zinc plated steel snap hook

## DIMENSIONS

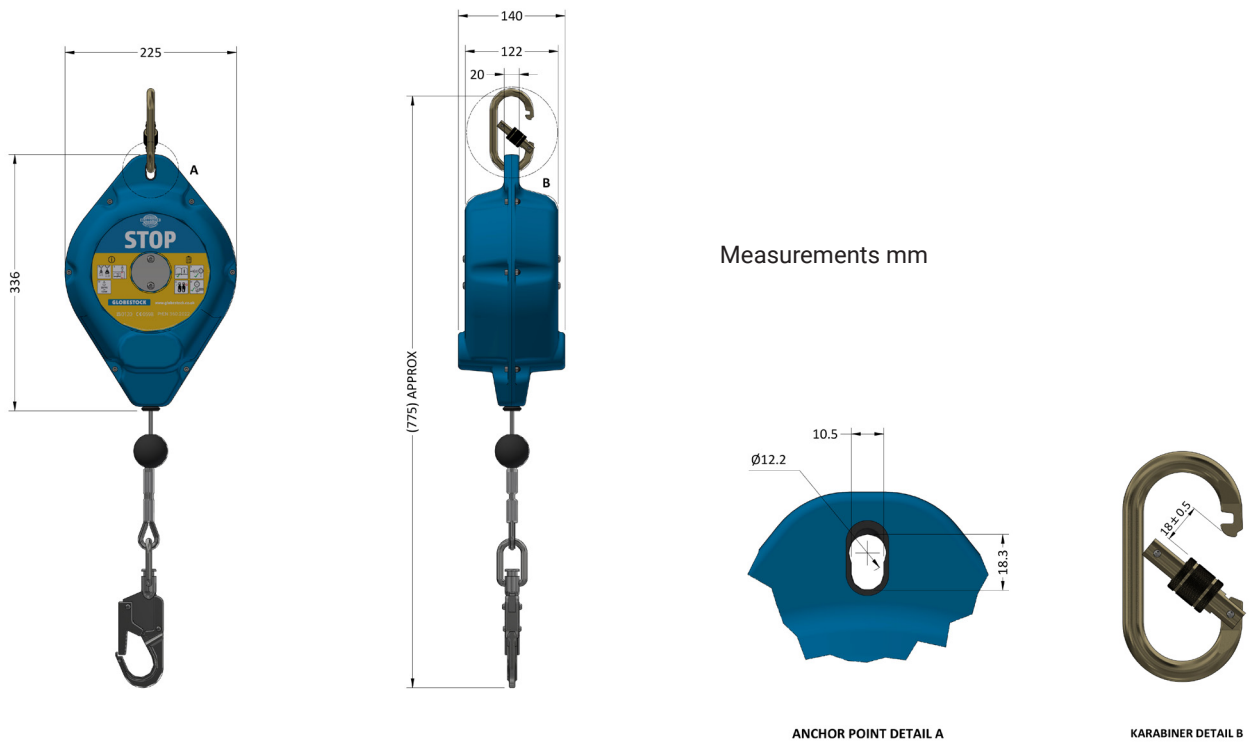

## ACCESSORIES



Holdall bag  
GSE-H/ALL