

Polyamide PA 6 White Pulley


ETT-190P

Specification

Product:	ETT-190P-20	ETT-190P-30	ETT-190P-40	ETT-190P-50	ETT-190P-60	ETT-190P-80	ETT-190P-100	ETT-190P-120	
SKU:	155-9-1	155-9-2	155-9-3	155-9-4	155-9-5	155-9-6	155-9-7	155-9-8	
Diameter of Pulley \varnothing D	(mm)	20	30	40	50	60	80	100	120
Diameter of Pulley \varnothing d	(mm)	11	22	28	38	44	59	74	94
Diameter of Groove for Rope \varnothing	(mm)	4	5	8	8	10	12	16	16
Load Capacity	(kg)	20	20	30	40	60	90	120	140
Fitting Width N	(mm)	8	11	13	15	18	23	28	28
Bore B	(mm)	5.2	5.2	6.2	6.2	8.2	10.2	12.2	14.2
Weight	(kg)	0.005	0.007	0.008	0.016	0.027	0.06	0.11	0.13

Features

- WEBI polyamide (PA 6 White/ Nylon) pulley type **ETT-190P**
- Capacities from 20kg to 140 Kg
- To suit 4mm - 16mm diameter hemp or synthetic rope
- For use where diversion of rope is required
- SWISS manufactured by "ETTER - Webi"
- This pulley is also available with various fixing options, see **ETT-156P** (p2) and **ETT-198P** (p3).

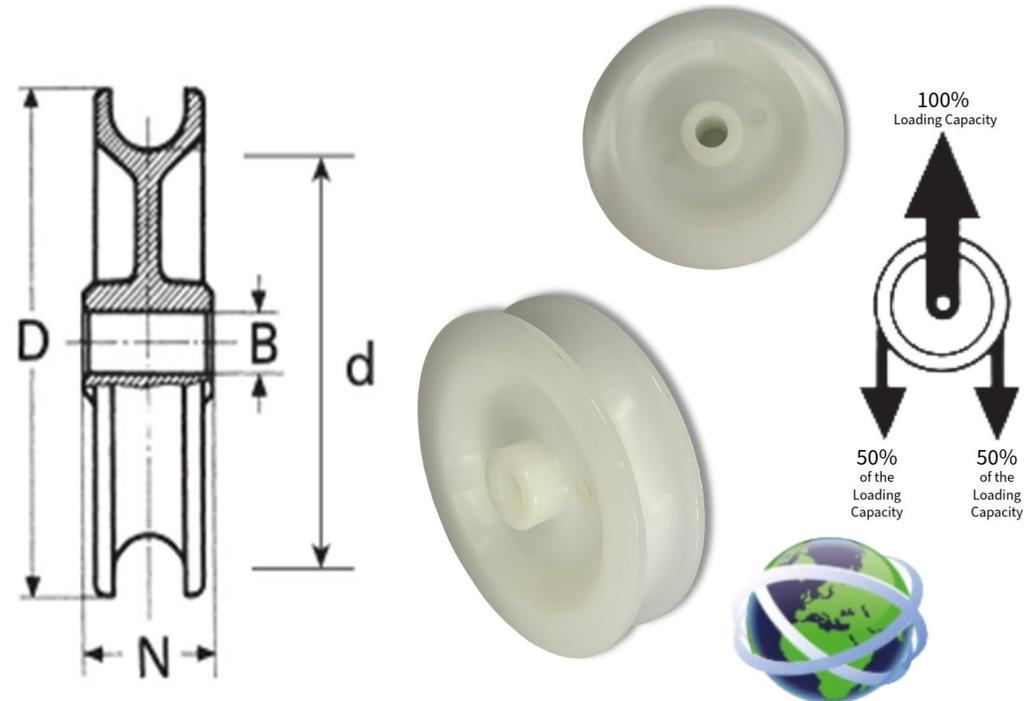

For guidance only – verify suitability before use. E&OE.

V3-26

POWERED BY ORPLEX

Polyamide White Pulley with Galvanised Bracket


ETT-156P

Specification

	Product:	ETT-156P-40	ETT-156P-50	ETT-156P-60	ETT-156P-80	ETT-156P-100
	SKU:	155-11-1	155-11-2	155-11-3	155-11-4	155-11-5
Diameter of Pulley Ø	(mm)	40	50	60	80	100
Load capacity	(kg)	30	40	60	90	120
Diameter of Groove for Rope Ø	(mm)	Ø8	Ø8	Ø10	Ø12	Ø16
Screw Fitting Surface	(mm)	57x35	60x35	60x35	74x50	74x50
Width between Fixing Holes (A)	(mm)	40	42	45	54	60
Height (H)	(mm)	56	66	76	98	116
Fixing hole Distance (B)	(mm)	20	20	20	30	30
Screw hole Diameter Ø	(mm)	5	5	5	6	6.5
Weight	(kg)	0.096	0.12	0.16	0.35	0.48

Features

- The WEBI **ETT-156P** consists of the ETT-190P polyamide (PA 6 White/ Nylon) pulley fitted with plain bearing and galvanised steel bracket.
- Capacities from 30kg to 120 Kg
- To suit 8mm - 16mm diameter hemp or synthetic rope
- For use where diversion of rope is required
- Suitable for applications in offshore, gas & oil, utilities and water treatment works
- For full pulley dimensions, please see the **ETT-190P** data sheet (p1)
- SWISS manufactured by "ETTER - Webi"

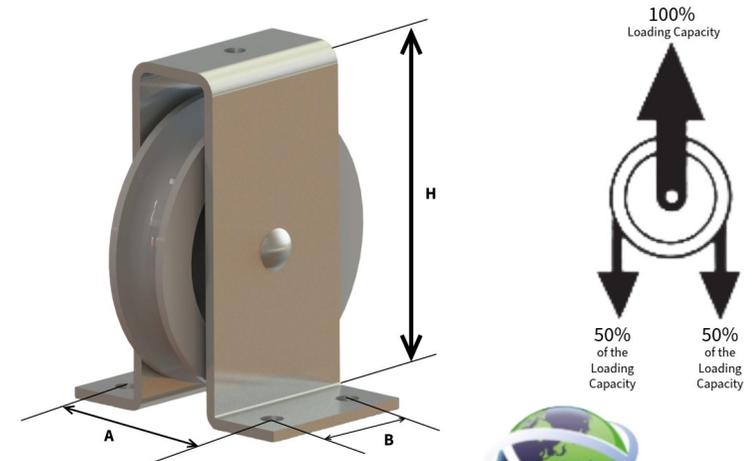

For guidance only – verify suitability before use. E&OE.

V3-26



POWERED BY ORPLEX

Polyamide Pulley with Rotating Steel Hook

ETT-198P

Specification

	Product:	ETT-198P-30	ETT-198P-40	ETT-198P-50	ETT-198P-60	ETT-198P-80	ETT-198P-100
	SKU:	155-21-1	155-21-2	155-21-3	155-21-4	155-21-5	155-21-6
Diameter of Pulley Ø	(mm)	30	40	50	60	80	100
Diameter of Groove for Rope Ø	(mm)	5	8	8	10	12	16
Hook's Load Capacity	(kg)	15	20	30	40	50	70
Weight	(kg)	0.04	0.05	0.09	0.11	0.28	0.41

Features

- The WEBI **ETT-198P** consists of the ETT-190P polyamide single pulley fitted with plain bearing, galvanised steel housing and rotating steel hook
- Capacities available from 15kg to 70kg
- To suit 5mm - 16mm diameter rope
- For full pulley dimensions, please see the **ETT-190P** data sheet (p1)
- For use with hemp and synthetic fibre ropes
- SWISS manufactured by "ETTER - Webi"
- Not to be used for personal winching, only for material winching



POWERED BY ORPLEX

For guidance only – verify suitability before use. E&OE.

V3-26