


GALV. CAST IRON PULLEY WITH ROTATING STEEL HOOK

Type ETT-198



	Product:	ETT-198-30	ETT-198-40	ETT-198-50	ETT-198-60	ETT-198-80	ETT-198-100
	SKU:	155-20-1	155-20-2	155-20-3	155-20-4	155-20-5	155-20-6
Diameter of Pulley D Ø	(mm)	30	40	50	60	80	100
Diameter of Pulley Ø d	(mm)	22	28	38	44	58	76
Diameter of Groove for Rope Ø	(mm)	5	7	8	10	12	16
Load Capacity of Pulley	(kg)	20	30	40	60	90	120
Fitting Width N	(mm)	11	13	15	18	23	28
Bore B	(mm)	5.2	6.2	6.2	8.2	10.2	12.2
Hook's Load Capacity	(kg)	15	20	30	40	50	70
Weight	(kg)	0.07	0.12	0.22	0.33	0.54	0.8

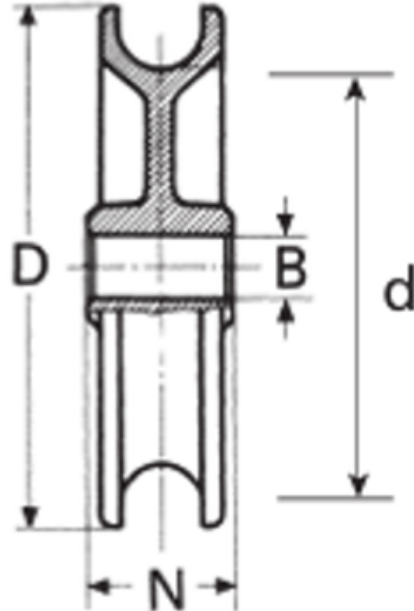

Features

- The WEBI **ETT-198** consists of the ETT-190 steel galvanised cast iron pulley fitted with plain bearing and galvanised steel bracket.
- Capacities from 15kg to 70kg
- To suit 5mm - 16mm diameter hemp or synthetic rope
- For use where diversion of rope is required
- Suitable for applications in offshore, gas & oil, utilities and water treatment works
- SWISS manufactured by "ETTER - Webi"



*For guidance only - verify suitability before use. E&OE. V2-26