

Best seller!

Pfaff Hand pallet trucks

Designed for the hire industry!


Pfaff's range of hand pallet trucks have gained an enviable reputation for strength, quality & durability. They are recognised and proven within the hire industry as the number one truck.

All Pfaff trucks have a high-quality epoxy coating, a comfortable ergonomic handle which can be turned on 210° to both sides and can be supplied with varied steering / load wheel combinations.

We can offer two fork widths in our Silverline (best seller) ranges to suit both the standard Euro and GKN pallet sizes.

Features

- Smooth and quiet motion due to the use of rubber rollers.
- Easy handling as the handle is released from the hydraulic system to the neutral position.
- Precisely adjustable pressure control valve to prevent damage from overloading.
- One-hand control for controlling all functions such as lifting, transporting and lowering.
- Ergonomic handlebar.
- Specially hardened axles, maintenance-free bearings and hard chrome-plated piston rods.
- Precision lowering valve to enable you to adjust the lowering speed to your requirements.

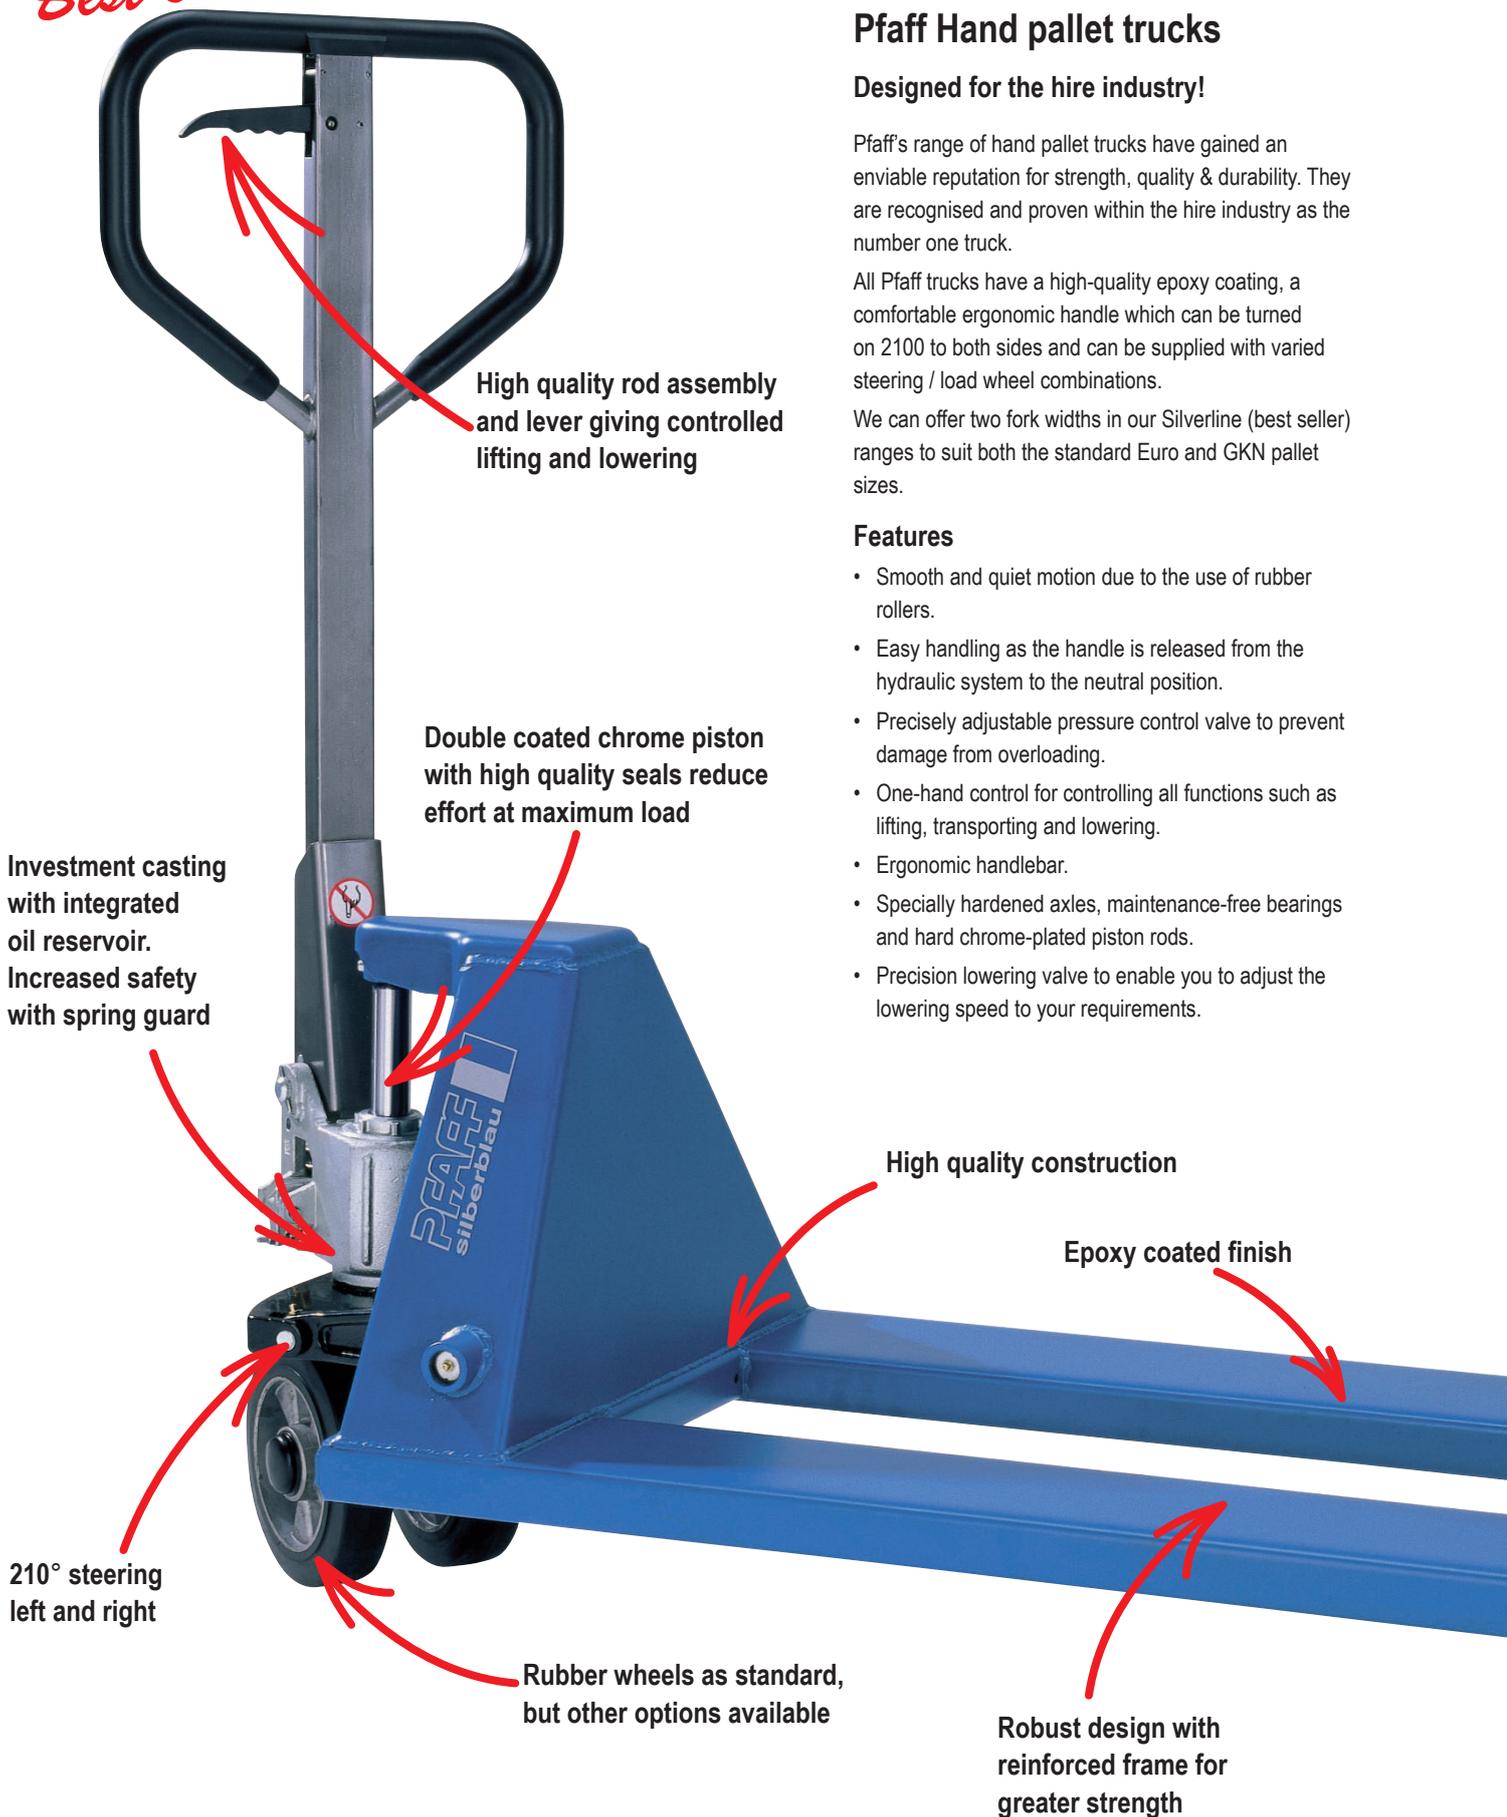

High quality rod assembly and lever giving controlled lifting and lowering

Double coated chrome piston with high quality seals reduce effort at maximum load

Investment casting with integrated oil reservoir. Increased safety with spring guard

210° steering left and right

Rubber wheels as standard, but other options available

High quality construction

Epoxy coated finish

Robust design with reinforced frame for greater strength

HU 25-115 TS SILVERLINE Standard pallet truck

Discount group: I5

Model	HU 25-115 TS	HU 25-115 TS (crate of 6)	HU 25-115 TS (park brake)
Art.-No.	N21225461	N21225461X	192083578
Capacity, kg	2500	2500	2500
Load center c, mm	600	600	600
Weight, kg	68	68	68
Tyre type ¹	VG/PUR	VG/PUR	VG/PUR
Steering rollers, mm	200 x 50	200 x 50	200 x 50
Load rollers, mm	80 x 70	80 x 70	80 x 70
Number of wheels/load rollers	2/4	2/4	2/4
Stroke h3, mm	115	115	115
Height of control handle h14, mm	1230	1230	1230
Fork height lowered h13, mm	85	85	85
Overall length L1, mm	1555	1555	1555
Fork height s, mm	48	48	48
Fork width e, mm	160	160	160
Fork length l, mm	1150	1150	1150
Outside dimension of forks b1, mm	540	540	540
Inside dimension of forks b3, mm	220	220	220
Ground clearance m1, mm	37	37	37
Aisle width pallet Ast, mm	1793	1793	1793
Turning circle radius Wa, mm	1275	1275	1275

Braked unit is a 'foot operated parking brake' ¹PA ... Polyamide, PUR ... Polyurethane, VG ... Solid rubber

