


AFID Stainless Steel Hand Winch

190kg to 900kg Capacities



GOLIATH

- General purpose braked winch for base or column mounting
- Large rope capacity
- Stainless steel with fully enclosed gears and brake encased in plastic cover
- Self locking internal brake with proven security concept
- Lightweight and compact
- Stamped gears with gear protection
- Folding crank available
- Supplied for use with wire rope

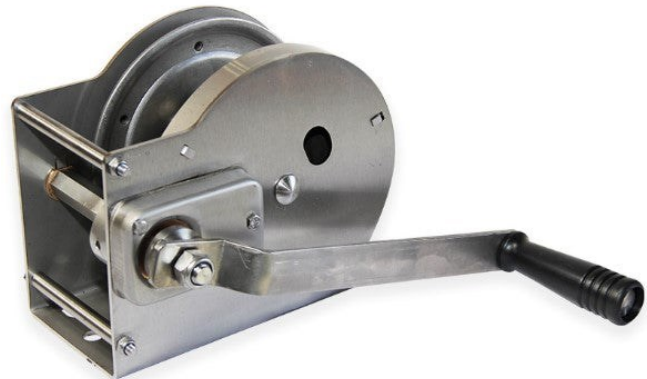

Features of this Range at a Glance

Lifting Capacity	190kg - 900kg
Mounting	Base or Column
Gearing	Spur
Crank	Fixed
Self Sustaining	Yes
Finish	Stainless Steel

	Product:	4AFMID	4AFID	6AFID	8AFID	12AFID
	SKU:	151-5-1	151-5-2	151-5-3	151-5-4	151-5-5
Lifting Capacity 1st Layer	(kg)	190	340	500	650	900
Lifting Capacity Last Layer	(kg)	80	190	240	270	490
Rope Diameter Ø	(mm)	3	4	5	6	7
Rope Capacity 1st Layer	(m)	0.57	1.94	1.73	1.7	1.76
Rope Capacity Total	(m)	8	10	12	19	12
Drum Hub Diameter Ø	(mm)	27	36	45	54	63
Number of Rope Layers	-	8	4	5	7	5
Gear Ratio	-	2.57:1	2.57:1	3.5:1	4.85:1	9.71:1
Lift per Crank Turn (1st Layer)	(mm)	37	54	45	39	23
Required Effort	(N)	15	24	24	23	25
Rolling Load Capacity on a 20% Incline	(kg)	350	500	750	900	1500
Weight	(kg)	2	2.5	3.6	5.5	7.4



Standard mount



European standard
EN13157-A1



Winch for cable
(not included)



316L Stainless steel

